


Control and Signaling Devices Ø 30.5 Series

MRP with effect from 10.02.2026

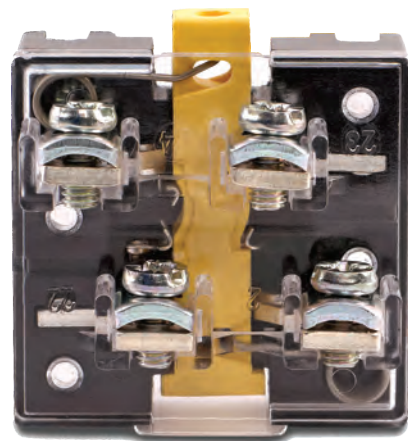

SALIENT FEATURES

The Ø30.5 range of pushbuttons, selector actuators, pilot lights and illuminated pushbuttons have been designed to provide the following salient features:

- Aesthetically elegant
- Easy and rapid mounting
- Dust, moisture and oil tight
- Robust in material of construction
- SELF WIPING CONTACTS
- Safe in operation
- Long mechanical and electrical life

The control devices are designed for flush mounting on control panels, desks and machines with plate thickness upto 6mm. Their dust, moisture and oil tight construction make them specially suitable for application in power plants, steel plants, cement plants, coal handling plants, foundries machine tools etc. Booted pushbuttons are used in very dusty atmospheres.

The pushbuttons comprises of the actuators and contact element. The actuator is designed to contain a full umbrella type of special rubber diaphragm inside the actuator housing in order to provide dust, moisture and oil tight onstruction. The different types of actuators include shrouded, unshrouded booted, mushroom spring return or stayput, mushroom jumbo, selector, key, luminous. Different versions including dust proofing version are described in detail in TEKNIC price list.

The contact element comprises of a contact housing, fixed and moving silver tipped contacts, a slider and a transparent cover through which the contacts can be inspected in operation. Contacts are double break are **self wiping** which ensures long life. Each contact element provides 1NO and 1NC contact. Each unit can take upto 4 contact elements. Separate contact elements can be used on different phases or polarities.

The pilot lights and illuminated pushbuttons are suitable for direct supply or supply through series resistor, using bayonet cap filament bulb.

The pilot light can also be provided with neon bulbs. Replacement of the bulb is easily done by unscrewing the front ring, holding the lense. Pilot lights can be provided with either glass or polycarbonate lenses in the following standard colours

- | | |
|---------------------|---------|
| • TRANSLUCENT WHITE | • AMBER |
| • GREEN | • BLUE |
| • RED | • CLEAR |

Supply voltage for direct connection or without series resistor: 6V-230V
Supply voltage for direct connection with series resistor : 24V-230V
Pilot lights can also be supplied with neon bulbs upto a voltage of 500V

FIXING

The control devices Ø30.5 can be fixed in any position on panel of 1 to 6mm thickness. They are secured from the front by means of a fixing ring. A set of rubber gaskets is supplied to provide water proofing and tightness between the unit and the panel. The exact number of rubber gaskets is to be selected depending upon the panel thickness. Fixing centres of 60mm are recommended between control stations to provide sufficient space for convenient terminal connections and assembly of legend plates.

The pushbutton can be either be mounted as complete unit on the front of the panel or the contact can be individually mounted with the actuator on the panel front plate. Also the pilot light can either be mounted as a complete unit on the front of the panel or the pilot light holder can be individually mounted with the lense on the front of the panel.

ELECTRICAL AND MECHANICAL CHARACTERISTICS

Rated insulation voltage	: 500V AC, 600V DC
Rated thermal current	: 10A
Contact operation	: Self wiping, slow double break, 1 NO + 1 NC
Make and break capacity (13947-5-1)	: AC15: 4A 415V
	: DC13: 0.5A 110V
Terminal capacity	: Maximum 2x1.5mm ²
	: Minimum 1X0.5mm ²
Ambient temperature	: -25°C to +70°C
Altitude	: < 3000 metres
Operating position	: All positions
Degree of protection	: IP 65
Mechanical life	: Over 1 million operations

ORDERING INSTRUCTIONS

1. Actuators, illuminated actuators, contact elements, pilot lights can be ordered separately or in combination.
2. No prefix before all actuators and combinations indicates Ø30.5 series
3. Numerical colour code has been added as suffix to indicate colour of the actuator or lense as follows:
Colour of Actuator: White Black Green Red Yellow Blue -
Colour of Lense: Translucent white - Green Red Amber Blue Clear
Colour code: 1 2 3 4 5 6 7
4. The type number of contact elements are S11, S12, S21, S22. All these have 1NO+1NC contacts. S11 is for mounting directly to actuator and S12 for coupling to S11 for obtaining 2NO+2NC. S21 is for individual mounting and S22 is for coupling for S21 for 2NO+2NC

BULBS

Filament Bulbs type BA15d

Voltage:	6	12	24	48	110	220
Wattage (max)	5-7	5-7	5-7	5-7	5-7	5-7


LEGEND PLATES

Legend plates are supplied with the following standards texts

START	FORWARD	UP	ON	OPEN	AUTO	SLOW	RESET
STOP	REVERSE	DOWN	OFF	CLOSE	HAND	FAST	INCH

TYPE NUMBERS

Some examples of type number

Actuator	Type AF3 means type actuator Ø30.5 GREEN
Pilot Light	Type PLB4 means pilot light without resistor RED
	Type PLBR3 means pilot light with series resistor GREEN
Complete Pushbutton	Type PSF411 means flush type pushbutton RED with 1NO+1NC
	



MRP w.e.f. 10.02.2026

Control & Signalling Devices 30.5 Ø

NON ILLUMINATED ACTUATOR					
	TYPE	COLOUR	ORDERING CODE	PRICE IN Rs.	MOQ NOS
					25 NOS.
		White	AF1	167.00	
		Black	AF2	167.00	
	Flush Momentary	Green	AF3	167.00	
		Red	AF4	167.00	
		Blue	AF6	167.00	
		Yellow	AF8	167.00	
					25 NOS.
		White	AP1	167.00	
		Black	AP2	167.00	
	Projecting Momentary	Green	AP3	167.00	
		Red	AP4	167.00	
		Blue	AP6	167.00	
		Yellow	AP8	167.00	
					25 NOS.
		Black	AB2	295.00	
		Green	AB3	295.00	
	Booted Momentary	Red	AB4	295.00	
		Blue	AB6	295.00	
		Yellow	AB8	295.00	
					25 NOS.
	Mushroom Momentary Head Ø 40mm	Black	AM2	184.00	
		Red	AM4	184.00	
					25 NOS.
	Jumbo Mushroom Momentary Head Ø 60mm	Black	AMJ2	295.00	
		Red	AMJ4	295.00	
HSN CODE : 85365010					



MRP w.e.f. 10.02.2026

Control & Signalling Devices 30.5 Ø

NON ILLUMINATED ACTUATOR					
	TYPE	COLOUR	ORDERING CODE	PRICE IN Rs.	MOQ NOS.
	MUSHROOM HEAD ACTUATOR				
					25 NOS.
	Mushroom	Black	AML2	273.00	
	Latching	Red	AML4	273.00	
	Head Ø 40mm				
					25 NOS.
	Jumbo Mushroom	Black	AMLJ2	378.00	
	Latching	Red	AMLJ4	378.00	
	Head Ø 60mm				
					
Key Mushroom					
Latching		Red	AMLKB4	523.00	
Head Ø 40mm					
		SELECTOR ACTUATOR			
					25 NOS.
	2 Position				
		Black	AS2-2P	339.00	
	2 Position				
		Black	AS2-2PSR	339.00	
	3 Position				
	STAY PUT	Black	AS2-3P	339.00	
					
HSN CODE : 85365010					


HSN CODE : 85365010



MRP w.e.f. 10.02.2026

Control & Signalling Devices 30.5 Ø

NON ILLUMINATED ACTUATOR						
	TYPE	COLOUR	COLOUR	ORDERING CODE	PRICE IN Rs.	MOQ NOS
	KEY SELECTOR					
	2 Position Stayput		Black	AK-2PB	501.00	25 NOS.
				AK-2PO	501.00	
				AK-2PI	501.00	
						
	Spring Return			AK-2POSR	501.00	
	3 Position Stayput		Black	AK-3PA	529.00	25 NOS.
				AK-3PB	529.00	
				AK-3PO	529.00	
						
* X stands for position in which key is removable						
HSN CODE : 85365010						



Control & Signalling Devices 30.5 Ø

	TYPE	COLOUR	ORDERING CODE	PRICE IN Rs. INTEGRAL LED	PRICE IN Rs. WITH LED BULB	MOQ NOS
	Illuminated Flush Actuator, Spring Return					
						25 NOS.
	LED Bulb, MCB15 type	White LED Bulb / White Lens	ALF1LB(S)		774.00	
	24V AC/DC,	Green LED Bulb / Green Lens	ALF3LB		445.00	
	110VAC, 110VDC	Red LED Bulb / Red Lens	ALF4LB		445.00	
	230VAC, 220VDC	Amber LED Bulb / Amber Lens	ALF5LB		445.00	
		Blue LED Bulb / Blue Lens	ALF6LB		807.00	
		White LED Bulb/ Clear Lens	ALF7LB(S)		774.00	
		Yellow LED Bulb / Yellow Lens	ALF8LB		445.00	
LED Bulb	Please mention the voltage required after the ordering code					
	PILOT LIGHT					
						25 NOS.
	Integral LED	White LED / White Lens	PLBR1L(S)	529.00		
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	PLBR3L	356.00		
	110VAC, 110VDC,	Red LED / Red Lens	PLBR4L	356.00		
	230VAC, 220VDC	Amber LED / Amber Lens	PLBR5L	356.00		
		Blue LED / Blue Lens	PLBR6L	707.00		
		White LED / Clear Lens	PLBR7L(S)	529.00		
		Yellow LED / Yellow Lens	PLBR8L	356.00		
Integral LED	Please mention the voltage required after the ordering code					
						25 NOS.
		White LED Bulb / White Lens	PLB1LB(S)		685.00	
	LED Bulb, MCB15 type	Green LED Bulb / Green Lens	PLB3LB		378.00	
	24V AC/DC,	Red LED Bulb / Red Lens	PLB4LB		378.00	
	110VAC, 110VDC	Amber LED Bulb / Amber Lens	PLB5LB		378.00	
	230VAC, 220VDC	Blue LED Bulb / Blue Lens	PLB6LB		723.00	
		White LED Bulb/ Clear Lens	PLB7LB(S)		685.00	
		Yellow LED Bulb / Yellow Lens	PLB8LB		378.00	
LED Bulb	Please mention the voltage required after the ordering code					
HSN CODE : 85365010						



MRP w.e.f. 10.02.2026


Control & Signalling Devices 30.5 Ø

CONTACT ELEMENTS				
	TYPE	ORDERING CODE	PRICE IN Rs.	MOQ NOS
S11 S12   S11 + S12	ACTUATOR MOUNTING			
				25 NOS.
	1NO+1NC	S11	292.00	
	1NO+1NC coupled to S11 to provide 2NO+2NC	S12	292.00	
S21 S22   S21 + S22	BASE MOUNTING			
				25 NOS.
	1NO+1NC	S21	292.00	
	1NO+1NC coupled to S21 to provide 2NO+2NC	S22	292.00	
HSN CODE : 85365010				

Control and signalling devices ø30.5

Some common types

Description	Type of Actuator	Type of Actuator or Lense	Colour of Element S11 (1NO + 1NC)	Type of Complete Control Device
Flush Pushbutton	AF3	Green	1NO + 1NC	PSF311
	AF8	Yellow	2NO + 2NC	PSF822
Projecting Pushbutton	AP2	Black	1NO + 1NC	PSP211
	AP4	Red	3NO + 3NC	PSP433
Booted Pushbutton	AB3	Green	1NO + 1NC	PSB311
	AB4	Red	2NO + 2NC	PSB422
Mushroom Pushbutton (Spring return)	AM2	Black	1NO + 1NC	PSM211
Mushroom Jumbo Pushbutton (Spring return)	AMJ4	Red	4NO + 4NC	PSMJ444
Mushroom Pushbutton Latching. Turn to Release.	AML2	Black	1NO + 1NC	PSML211
	AML4	Red	2NO + 2NC	PSML422
Mushroom Pushbutton Latching. Key to Release.	AMLKB4	Red	1NO + 1NC	PSMLKB411
Selector Actuator (2 Pos.)	AS2-2P	Black	1NO + 1NC	PSS211-2P
Selector Actuator (3 Pos.)	AS2-3P	Black	2NO + 2NC	PSS222-3P
Key Actuator (2 Pos.)	AK2-2P		1NO + 1NC	PSK211-2P
Key Actuator (3 Pos.)	AK2-3P		2NO + 2NC	PSK222-3P
Pilot Light for direct connection upto 230V (LED Bulb)		Red		PLB4LB (240V AC)
Pilot Light through series resistor for 230V (LED Bulb)		Green		PLBR3LB (240V AC)
Illuminated Pushbutton direct connection upto 230V (LED Bulb)	AL5LB	Amber	1NO + 1NC	PSL5LB11 (230V)

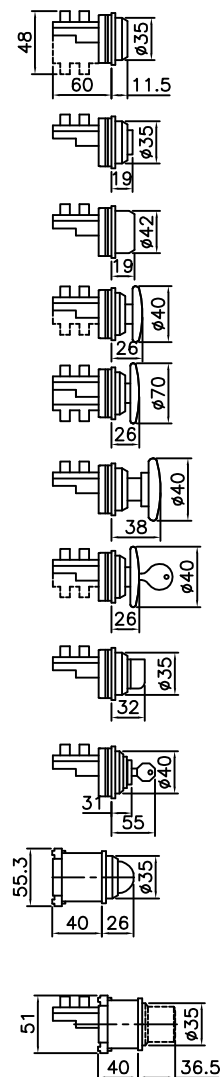

Other products include terminals, appliance controlgear and ø22.5 controlgear products

GENERAL TERMS AND CONDITIONS

General Terms : Prices are ex-works Mumbai
HSN CODE : 85365010 for all the products of this MRP List
GST : 18%

Prices are subject to revision without notice and ruling at the time of delivery.

This price list supersedes all previous Price Lists.

Warranty Policy : TEKNIC equipment is guaranteed under the following terms:

For a period of 12 months from the date of sale, TEKNIC guarantees that its products are free from defects in material and workmanship, with the exception of consumables rendered unserviceable through normal use. During the said period, TEKNIC will replace or repair all parts acknowledged as defective due to factory workmanship and which have been returned in a timely manner by Buyer to TEKNIC and all costs and duties paid, together with a detailed description of the failure and a certified declaration of the number of hours of operation. Repaired or replaced parts will be redelivered FCA (named place) as per INCOTERMS 2000. This warranty is subject to the provision of correct usage, proper maintenance and does not cover defects arising out of fire, faulty operation, accident, inefficient maintenance and willful or accidental damage.

TEKNIC guarantee applies to all equipment, parts and components stored, installed, protected, maintained and used in accordance with TEKNIC specifications and instructions, and respecting the rules for normal use, without any modification by Buyer.

All other conditions or warranties, whether express or implied, relating to the quality and operation of the equipment are excluded, as well as any liability for loss or damage caused directly or indirectly by the equipment or resulting from its use.

Proof of purchase to be provided to avail warranty.

TEKNIC ELECTRIC (I) PVT. LTD.

Reg.Office : 116, Hammersmith Industrial Estate, Mahim (W), Mumbai – 400016.

Head Office : 703/704/705, Madhava, Bandra Kurla Complex, Bandra (E), Mumbai – 400051. Tel : +91-22-42532500

Works : 65, Marol Co-op. Industrial Estate Ltd., M. Vassanji Road, Andheri (East), Mumbai – 400059. Tel : +91-22-42534500

Email : teknico@teknico.co.in mfg@teknico.co.in Website : www.teknico.co.in